


方形电感型接近传感器




选型指南

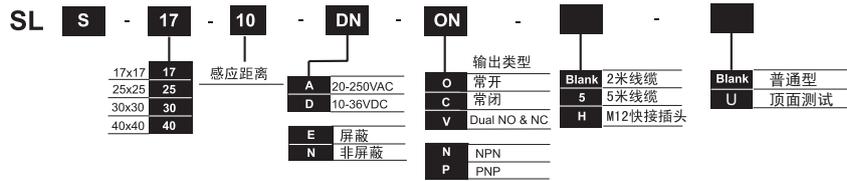

SLS-17 系列方形 17×17 电感型接近传感器

外壳材质: 塑料
 环境温度: -25℃~70℃
 保护: 极性反接保护+短路、过流保护
 动作指示: 红色LED
 防护等级: IP67 (EN 60529)
 执行标准: GB/T14048.10 EN 60947-5-2
 认证: UL认证: E310408 CCC认证: 20080103050268320

安装尺寸

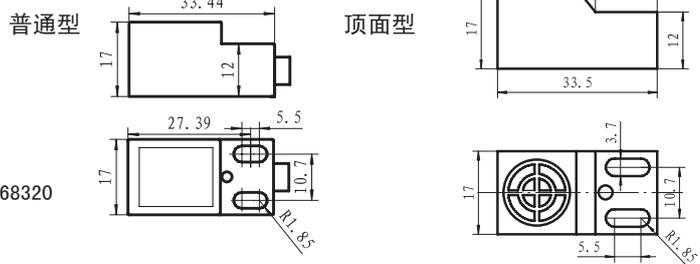

参数指标

工作方式	规格型号	Sn 感应距离mm	安装		额定电压			输出					
			屏蔽式	非屏蔽式	10-30VDC	10-36VDC	20-250VAC	常开	常闭	NPN	PNP	负载电流 mA	开关频率 Hz
DC-2线屏蔽型	SLS-17-5DE0	5	●		●			●				50	800
	SLS-17-5DEC	5	●		●				●			50	800
DC-2线非屏蔽型	SLS-17-10DNO	10		●	●			●				50	500
	SLS-17-10DNC	10		●	●				●			50	500
DC-2线顶面测试 屏蔽型	SLS-17-5DE0	5	●		●			●				50	800
	SLS-17-5DEC	5	●		●				●			50	800
DC-2线顶面测试 非屏蔽型	SLS-17-10DNO	10		●	●			●				50	500
	SLS-17-10DNC	10		●	●				●			50	500
DC-3线屏蔽型	SLS-17-5DEON	5	●			●		●		●		200	800
	SLS-17-5DEOP	5	●			●		●			●	200	800
	SLS-17-5DECN	5	●			●			●	●		200	800
	SLS-17-5DECP	5	●			●			●		●	200	800
DC-3线非屏蔽型	SLS-17-10DNON	10		●		●		●				200	500
	SLS-17-10DNOP	10		●		●		●				200	500
	SLS-17-10DNCN	10		●		●			●	●		200	500
	SLS-17-10DNCP	10		●		●			●		●	200	500
DC-3线顶面型 (屏蔽型)	SLS-17-5DEON	5	●			●		●				200	800
	SLS-17-5DEOP	5	●			●		●				200	800
	SLS-17-5DECN	5	●			●			●	●		200	800
	SLS-17-5DECP	5	●			●			●		●	200	800
DC-3线顶面型 (非屏蔽型)	SLS-17-10DNON	10		●		●		●				200	500
	SLS-17-10DNOP	10		●		●		●				200	500
	SLS-17-10DNCN	10		●		●			●	●		200	500
	SLS-17-10DNCP	10		●		●			●		●	200	500

M12连接器



M12连接器技术参数


一般参数	
锁紧方式	螺纹 M12×1
电缆连接方式	压紧, 浇注
法兰连接方式	螺钉连接, 焊接, 浸焊, 带导线
连接截面mm ²	Max. 0.25 / Max. 0.34
防护等级	IP67 / IP68
机械寿命	大于500次插拔
高温	+85℃ (静止状态)
低温	-25℃ (静止状态)

选型指南




浇注电缆插头(孔), UL认证

直角M12连接器
QC-4-12-S-2-PVC



弯角M12连接器
QC-4-12-A-2-PVC



M12连接器针位图



- 1 棕色
- 2 白色
- 3 兰色
- 4 黑色