



BAL 系列车辆倒车报警器

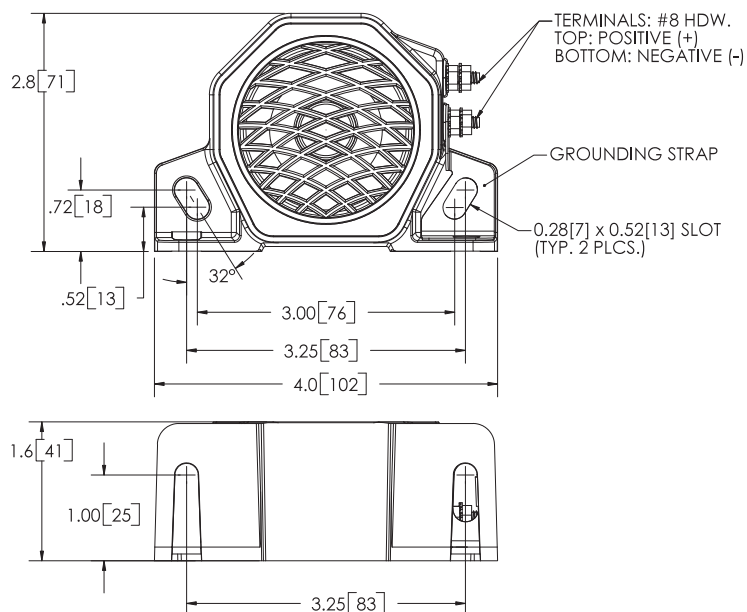

型号	声压级	额定电压	防护等级	SAE 类型	工作温度
BAL-580	间断 87 dB @1.2m(4ft) 960 to 1440 Hz	12-80VDC 0.1 A Max	IP65	D	-40°F to +185°F -40°C to +85°C
BAL-548	间断 97 dB @1.2m(4ft) 960 to 1440 Hz	12-80VDC 0.1 A Max	IP65	C	-40°F to +185°F -40°C to +85°C
BAL-520	间断 104 dB @1.2m(4ft) 960 to 1440 Hz	12-24VDC 0.3 A Max	IP65	C	-40°F to +185°F -40°C to +85°C
BAL-505	间断 104 dB @1.2m(4ft) 960 to 1440 Hz	12-24VDC 0.3 A Max	IP65	D	-40°F to +185°F -40°C to +85°C
BAL-532D	间断/警笛 104 dB @1.2m(4ft) 960 to 1440 Hz	12-24VDC 0.6 A Max	IP65	F	-40°F to +185°F -40°C to +85°C
BAL-545D	间断/警笛 93 dB @1.2m(4ft) 960 to 1440 Hz	12-24VDC 0.6 A Max	IP65	F	-40°F to +185°F -40°C to +85°C
BAL-524D	间断/连续 108 dB @1.2m(4ft) 960 to 1440 Hz	12-24VDC 0.6 A Max	IP65	F	-40°F to +185°F -40°C to +85°C
BAL-523	PWM 106 dB @1.2m(4ft) 960 to 1440 Hz	12-24VDC 0.6 A Max	IP65	F	-40°F to +185°F -40°C to +85°C
BAL-550	智能 82-105 dB @1.2m(4ft) 960 to 1440 Hz	12-24VDC 0.2 A Max	IP65	F	-40°F to +185°F -40°C to +85°C
BAL-551	智能 77-97 dB @1.2m(4ft) 960 to 1440 Hz	12-80VDC 0.2 A Max	IP65	F	-40°F to +185°F -40°C to +85°C

BAL 系列车辆倒车警报器

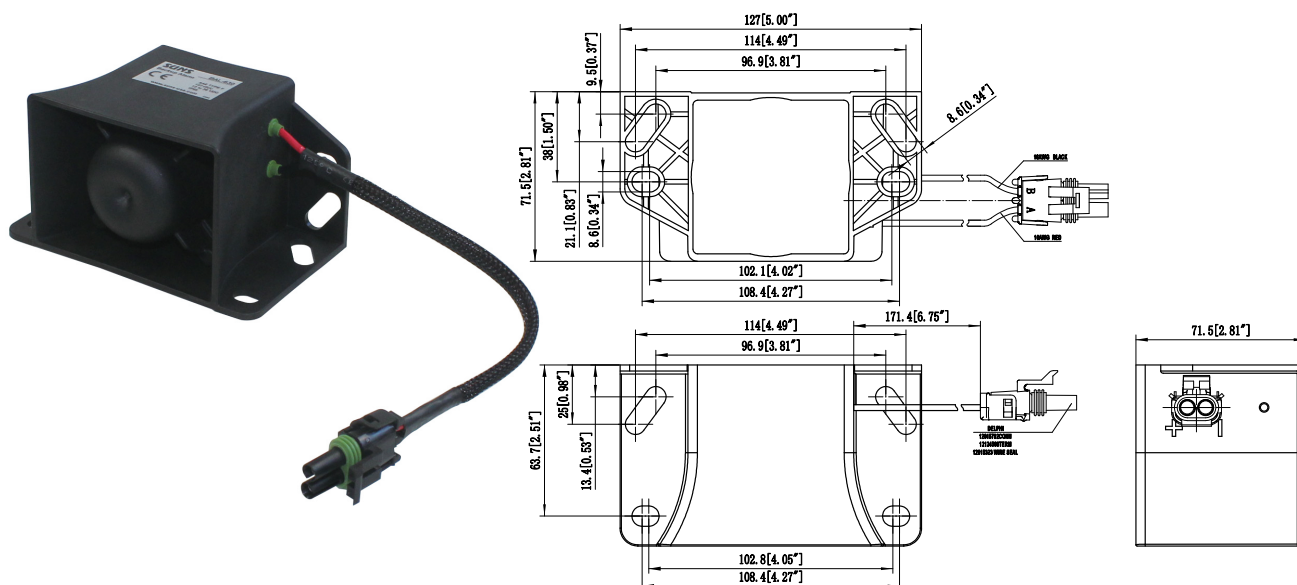

型号	声压级	额定电压	防护等级	SAE 类型	工作温度
BAL-610	间断 97 dB @1.2m(4ft) 960 to 1440 Hz	12-36 VDC 0.3 A Max	IP65	C	-40°F to +185°F -40°C to +85°C
BAL-630	间断 107 dB @1.2m(4ft) 960 to 1440 Hz	12-36 VDC 0.6 A Max	IP65	C	-40°F to +185°F -40°C to +85°C
BAL-673	粉红噪声 97 dB @1.2m(4ft) 960 to 1440 Hz	12-80 VDC 0.3 A Max	IP65	C	-40°F to +185°F -40°C to +85°C