


MP-5 系列磁簧安全开关 (IP68)

技术参数

壳体材质	玻璃增强纤维塑料
操作温度	-25 - 70°C (-13° F - 158° F)
防护等级	IP68 (IEC/EN 60529)
额定电压	100VAC/DC 400mA 或
额定电流	230VAC 2A 30VDC 1A
辅助接触开关	
额定电压	24VDC
额定电流	10mA
操作方式	磁性编码; 干簧管
机械寿命	1000万次
防振等级	根据 IEC/EN 60947-5-2
耐冲击	50 g/ms
耐振性	11 g/ms
EMC规范	符合 EN 61496-1/EN 50022 Part A
安全等级	等级4 根据EN ISO 13849-1

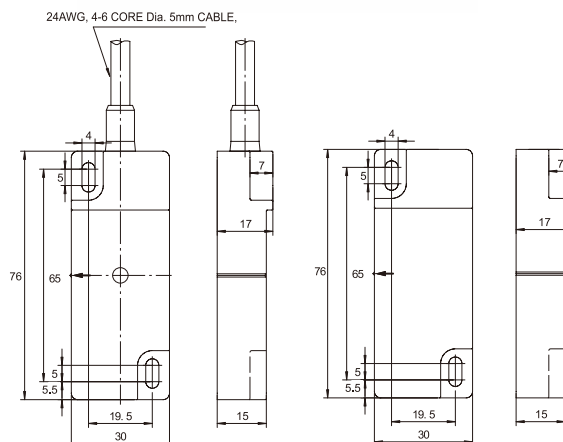

型号表格

型号	执行器 型号	开关距离 S_{on} [mm]	电路图 (闭合时)	额定电流电压
MP5-A-10	MP5-M	S_{on} : 6mm		230VAC 2A 30VDC 1A
MP5-A-10M	MP5-MM	S_{on} : 9mm		
MP5-D-03P	MP5-M	S_{on} : 6mm		100V AC/DC 400mA
MP5-D-03PM	MP5-MM	S_{on} : 9mm		
MP5-D-03S	MP5-M	S_{on} : 6mm		100V AC/DC 400mA
MP5-D-03SM	MP5-MM	S_{on} : 9mm		
MP5-D-11	MP5-M	S_{on} : 6mm S_{off} : 15mm		100V AC/DC 400mA
MP5-D-11M	MP5-MM	S_{on} : 9mm S_{off} : 18mm		
MP5-D-11E	MP5-M	S_{on} : 6mm S_{off} : 15mm		24VDC 10mA
MP5-D-11EM	MP5-MM	S_{on} : 9mm S_{off} : 18mm		
MP5-D-12S	MP5-M	S_{on} : 6mm S_{off} : 6mm		100V AC/DC 400mA
MP5-D-12SM	MP5-MM	S_{on} : 9mm S_{off} : 18mm		
MP5-D-12SE	MP5-M	S_{on} : 6mm S_{off} : 15mm		24VDC 10mA
MP5-D-12SME	MP5-MM	S_{on} : 9mm S_{off} : 18mm		
MP5-D-12	MP5-M	S_{on} : 6mm S_{off} : 15mm		100V AC/DC 400mA
MP5-D-12M	MP5-MM	S_{on} : 9mm S_{off} : 18mm		
MP5-D-12E	MP5-M	S_{on} : 6mm S_{off} : 15mm		24VDC 10mA
MP5-D-12ME	MP5-MM	S_{on} : 9mm S_{off} : 18mm		