

SF9系列封闭式限位开关

特点

- 紧凑而坚固的铝合金外壳
- 接线空间大
- 高精度开关
- 开关动作点重复性高
- 使用寿命长
- 带电负载能力高

动作特性定义

- OF 动作力
- RF 复位力
- OT 超行程
- TT 总行程
- PT 动作行程（预行程）
- MD 距差
- OP 动作位置
- PO 绝对开离位置

规格

操作速度	0.02mm - 0.5m/s
操作频率	机械: 120 次/分 电气: 20 次/分
绝缘电阻	>100MΩ @500V DC
接点电阻	<25mΩ (初始值)
额定电流/电压	SF9D/SF9Y 10A 125/250VAC, 2A 480VAC, 1/2HP 125/250VAC SF9S 15A, 1/2HP 125/250VAC
耐压值	同级端子间1000VAC 1分钟 端子对地或无载金属间2500VAC 1分钟
寿命	机械 1.0 × 10 ⁷ 次 电气 5.0 × 10 ⁵ 次
环境温度	-25~+80°C (-13~176°F)
相对湿度	< 95%
保护等级	IP65/IP60

选型指南


SF9 2	Q -	11 -	A -	L -	R
电流	头部密封	头部型式	出线	头部位置	可复位
2: 20A 3: 25A D: 10A 2NO/2NC Y: 10A 2NO/2NC (公共端) S: 15A (NC 强制开离)	Q: 无密封 N: 密封	11: 柱塞式 21: 横向滚轮柱塞式 22: 滚轮柱塞式 62: 滚轮臂杆式 63: 单向滚轮臂杆式 00: 弹簧式	A: 1/2NPT B: PG13.5 C: M20	空白: 在右侧 L: 在左侧	空白: 不可复位 R: 可复位

安装尺寸 单位: mm

SF9_N11-A-L:




OF Max 11.2N (2.5 lbs)
PT Max 2.39mm (0.094 in)
OT Min 5.56mm (0.219 in)
MD Max 0.26mm (0.01 in)

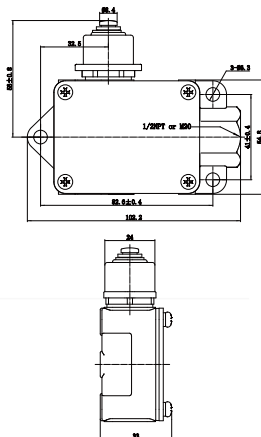

SF9_N11-A:




OF Max 11.2N (2.5 lbs)
PT Max 2.39mm (0.094 in)
OT Min 5.56mm (0.219 in)
MD Max 0.26mm (0.01 in)

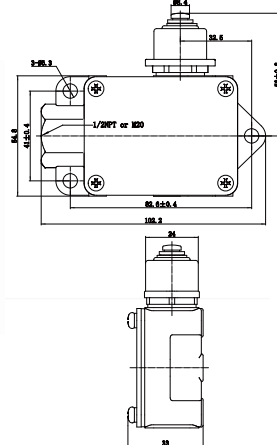

SF9_Q22-A-L:



OF Max 11.2N (2.5 lbs)
PT Max 2.39mm (0.094 in)
OT Min 3.96mm (0.156 in)
MD Max 0.26mm (0.01 in)

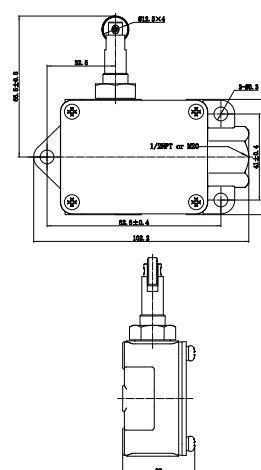


*滚轮方向现场可调

SF9_Q22-A:




OF Max 11.2N (2.5 lbs)
PT Max 2.39mm (0.094 in)
OT Min 3.96mm (0.156 in)
MD Max 0.26mm (0.01 in)

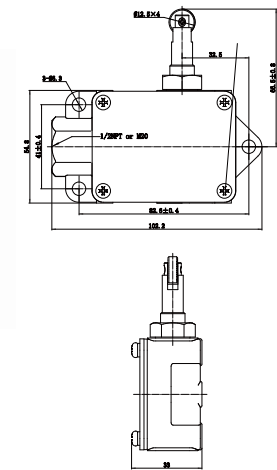

*滚轮方向现场可调


SF9系列封闭式限位开关

SF9_-N00-A-L:

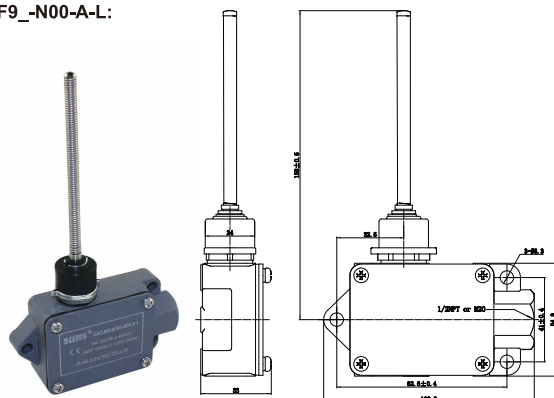


PT Max 15°

SF9_-N00-A:

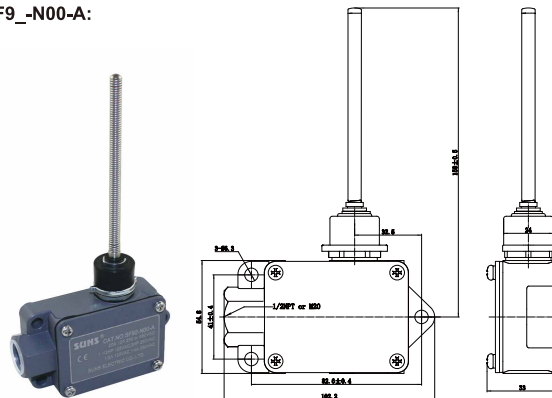


PT Max 15°

SF9_-N62-A:

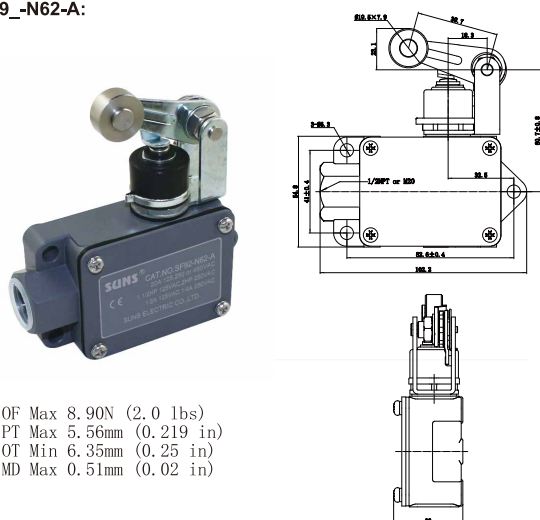


OF Max 8.90N (2.0 lbs)
PT Max 5.56mm (0.219 in)
OT Min 6.35mm (0.25 in)
MD Max 0.51mm (0.02 in)

SF9_-N63-A:

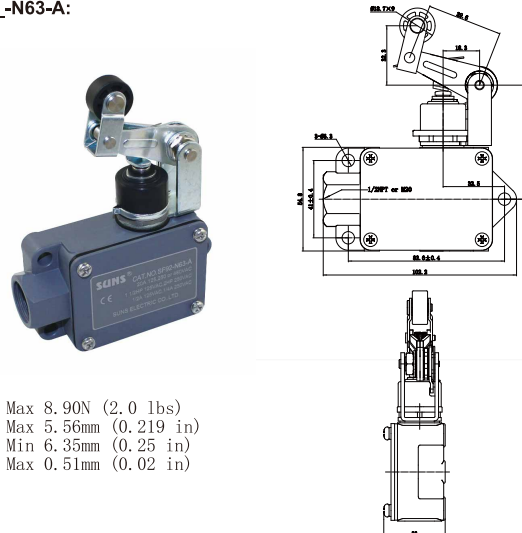

OF Max 8.90N (2.0 lbs)
PT Max 5.56mm (0.219 in)
OT Min 6.35mm (0.25 in)
MD Max 0.51mm (0.02 in)

SF9_-N11-A-R:

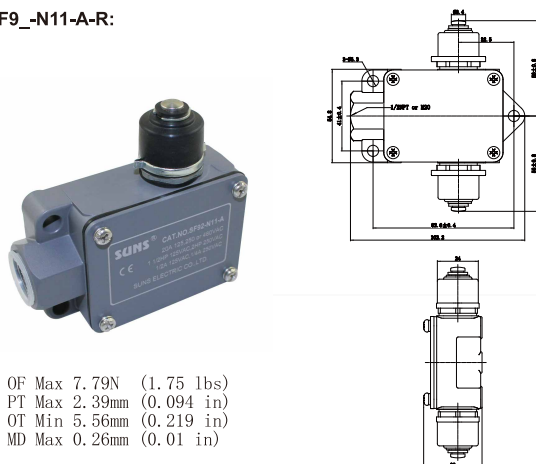

OF Max 7.79N (1.75 lbs)
PT Max 2.39mm (0.094 in)
OT Min 5.56mm (0.219 in)
MD Max 0.26mm (0.01 in)