

CSD/CSN/CS 系列控制器



CSD



CSN



CS


控制器

按钮数量	铭牌标示和特性	芯部形式	面板安装 NEMA 1 IP40	防水和防尘 NEMA 4 IP65	不锈钢平头 面板 IP20
1	开始	1	CSD101	CSN101	CS110 (01)
	停止	3	CSD102	CSN102	CS101 (02)
	停止 (蘑菇头按钮)	3	CSD103	CSN103	
	停止 (锁上)	3	CSD104	CSN104	
	通用 (铭牌可选)	16	CSD107	CSN107	CS110 (07)
	关—开 (选择开关)	19	CSD111		
	3档开关 (选择开关)	17	CSD112		
2	通用选择开关 (标示块可选)	19 or 17	CSD114		
	开始—停止	145	CSD201	CSN201	CS211-C (01)
	开始—停止 (锁功能)	146	CSD202	CSN202	
	开始—停止 (蘑菇头停止)	145	CSD203	CSN203	
	开始—停止 (锁上停止)	145	CSD204	CSN204	
	开始—停止 (两个都是蘑菇头)	145	CSD205	CSN205	
	Forward-Reverse	146	CSD206	CSN206	CS220-C (06)
	Open-Close	146	CSD207	CSN207	CS220-C (07)
	Up-Down	146	CSD208	CSN208	CS220-C (08)
	Raise-Lower	146	CSD209	CSN209	CS220-C (09)
	On-Off	145	CSD210	CSN210	CS220-C (10)
	On-Off	146	CSD211	CSN211	CS220-C (11)
	Universal (w/o legend inserts)	25	CSD214	CSN214	CS222 (14)
	Start-Stop (Maintained Contact)	10	CSD215	CSN215	CS211-M-L (15)
	On-Off (Maintained Contact)	10	CSD216	CSN216	CS211-M-L (16)
	Universal (Maintained contact w/o legend inserts)	10	CSD218	CSN218	CS211-M-L (18)
3	Fast-Slow-Stop	109	CSD301		
	Forward-Reverse-Stop	109	CSD302		
	Open-Close-Stop	109	CSD303		
	Raise-Lower-Stop	109	CSD304		
	Up-Down-Stop	109	CSD305		
	Start-Jog-Stop	109	CSD316		
	Universal (w/o legend inserts)	8	CSD307		
	Start-Stop, Red Pilot Light: 120Vac/dc	145 & 121	CSD308		

电气连接参数

(OSHA 规定, 1910.70部分高架和门式起重机, 按钮开关盒的电压限制为150VAC或300VDC)





ACNEM NEMA600							DCNEM NEMAP600		
Volts	Inductive 35% Power Factor					Resistive 75% Power Factor	Volts	Inductive and Resistive	
	Make		Break		Continuous Carrying Amperes	Make, Break and Continuous Carrying Amperes		Make and Break Amperes	Continuous Carrying Amperes
	A	VA	A	VA					
120	60	7200	6	720	10	10	120	1.1	5
240	30	7200	3	720	10	10	240	0.55	5
480	15	7200	1.5	720	10	10	600	0.2	5
600	12	7200	1.2	720	10	10			

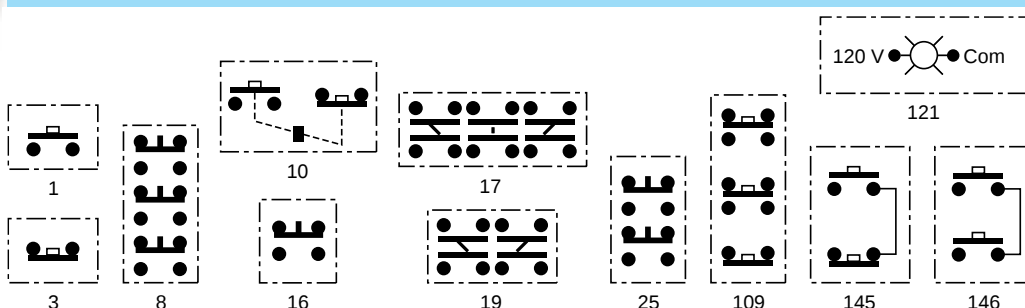



CSD/CSN/CS 系列开关盒

尺寸:


CSD 面板安装类型 **Glass Filled Polyester Cover**

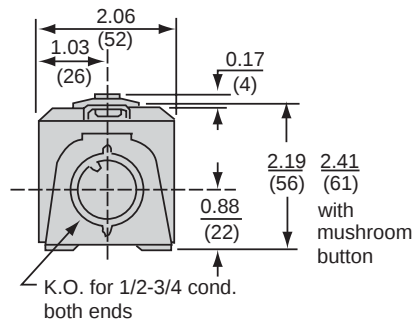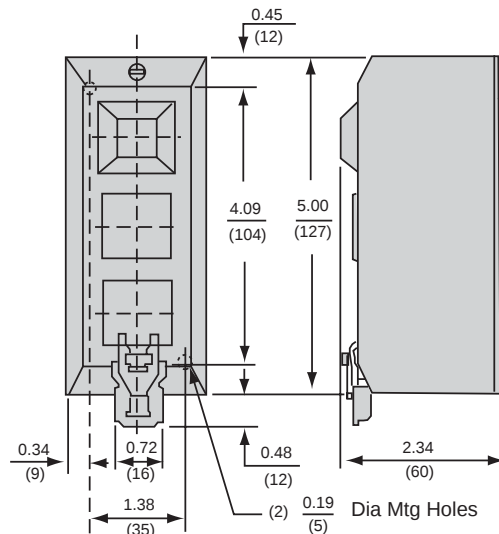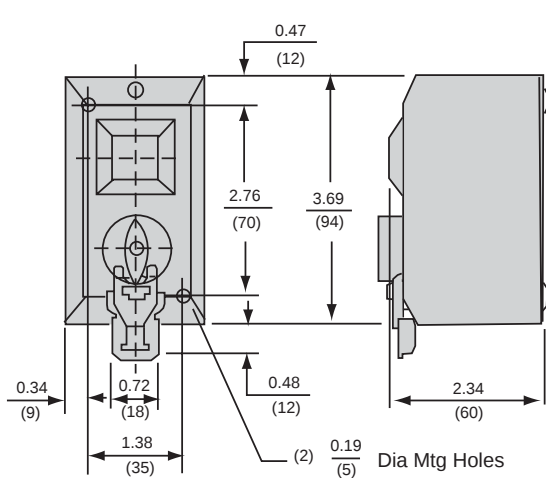

防水并防尘类型CSN, 锌合金壳体

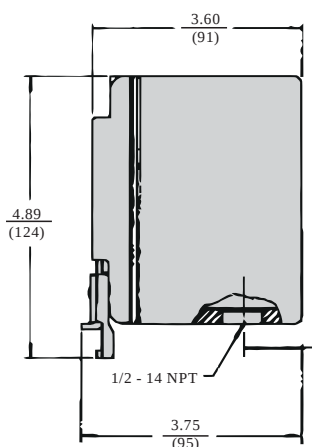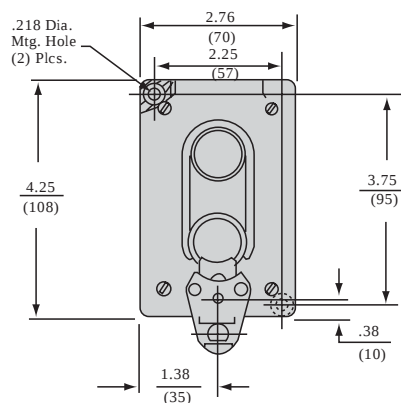

平面安装类型CS, 不锈钢壳体

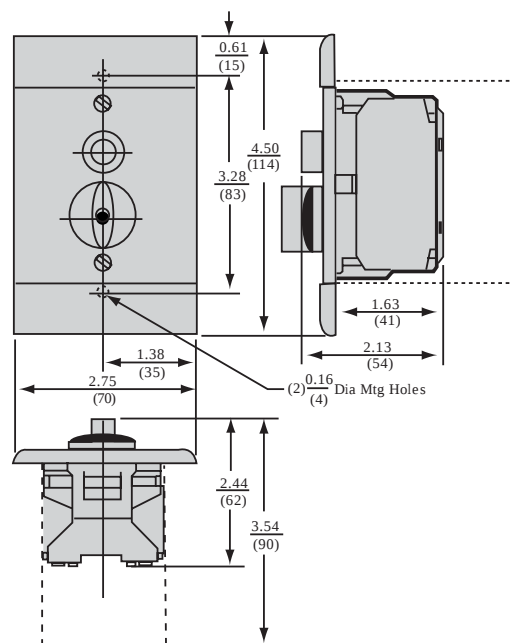

Dual Dimensions: Inches
mm