

特点

- ## 动作特性定义

OF 动作力	PT 预行程
RF 复位力	MD 距差
OT 超行程	OP 动作位置
TT 总行程	


规格

操作速度	0.02mm-0.5m/sec
绝缘电阻	>100MΩ@500V DC
接点电阻	<25mΩ (初值)
额定电流/电压	SP91 15A 125/250/480VAC, 1/8HP 125VAC, 1/4HP 250VAC SP92 20A 125/250/480VAC, 1/8HP 125VAC, 1/4HP 250VAC SP93 25A 125/250/480VAC, 1/8HP 125VAC, 1/4HP 250VAC SP9D/SP9Y 10A 125/250VAC, 2A 480VAC, 1/2HP 125/250VAC SP9S 15A 125/250/480VAC, 1/2HP 125/250VAC
介电强度	2200VAC for 1 min
寿命	机械 1.0 x10 ⁷ (次) 电气 1.0 x10 ⁶ (次)
环境温度	-40~+70°C (-40~158°F)
抗震性	25gn(10..150 Hz, 11ms) per IEC60068-2-6
抗冲击性	60gn(9ms) per IEC60068-2-27
防护等级	IP60/IP65
危险区域	NEMA 7, Class I, Groups C and D NEMA 9, Class II, Groups E, F and G Ex d IIB + H2 T6 Category II 2 G

[illegible]


尺寸 单位: mm

SP91-Q31-A-EX:

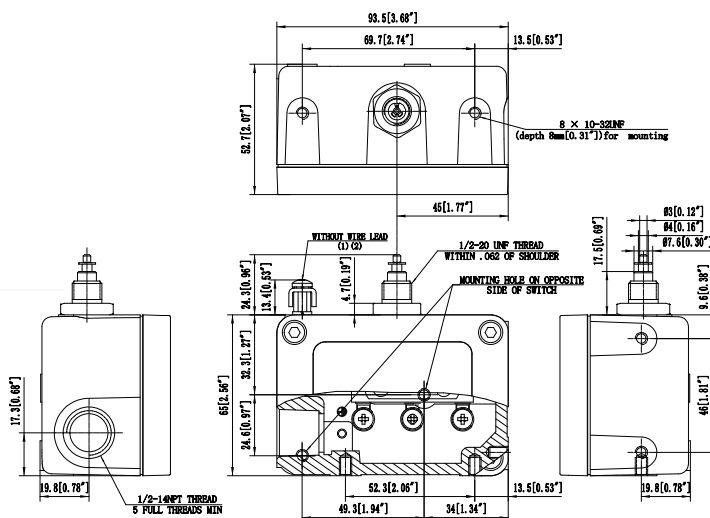


SP9-EX 系列防爆限位开关


SP91-Q04-A-EX

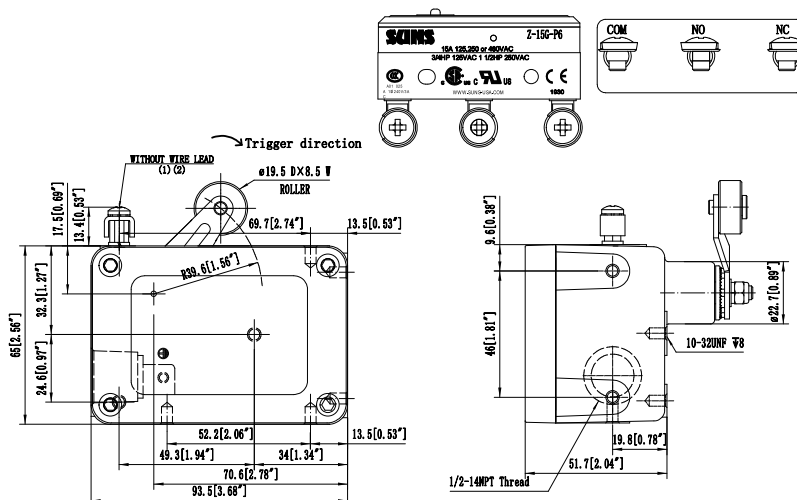

SP91-Q11-A-EX

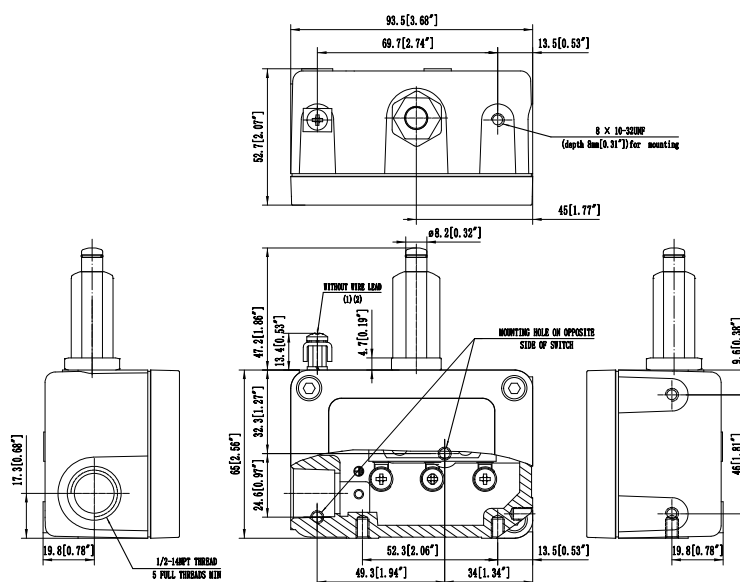

安装支架

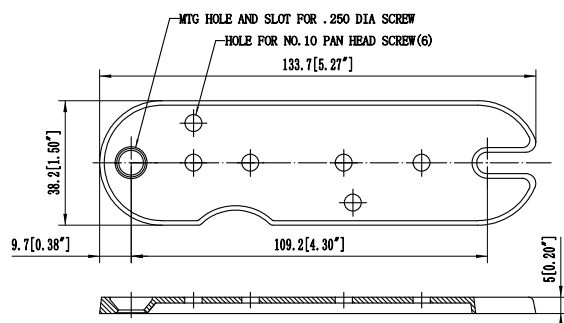

MOUNTING BRACKET (1) AND 10-32UNF X .250 REF PAN HEAD SCREW (2) FURNISHED UNASSEMBLED SCALE-HALF SIZE