

CSM/CSS Series Control Station Enclosures

Features

- Designed to accept 22mm or 30mm oil tight pushbuttons, switches and pilot lights
- Provides protection from dirt, dust, oil and water
- Smooth continuously welded seams
- Welded brackets provide for enclosure mounting


Specifications

Housing Material	Aluminum or Stainless Steel
Industrial standards	NEMA Type 4, 4X, 12 & Type 13
	UL Listed Type 4, 4X & 12
	CSA Type 4, 4X & 12
	IEC 60529, IP65

Selection Guide:

CS	S	-	30	01	-	A
	Enclosure Material		Hole Size	Number of Holes		Conduit
	M: Sheet Metal Body		30: 30mm			A: 1/2" NPT
	S: Sheet Metal Stainless Steel		22: 22mm			B: PG13.5
						C: M20
						F: 3/4" NPT

CSM/CSS Series Control Station Enclosures

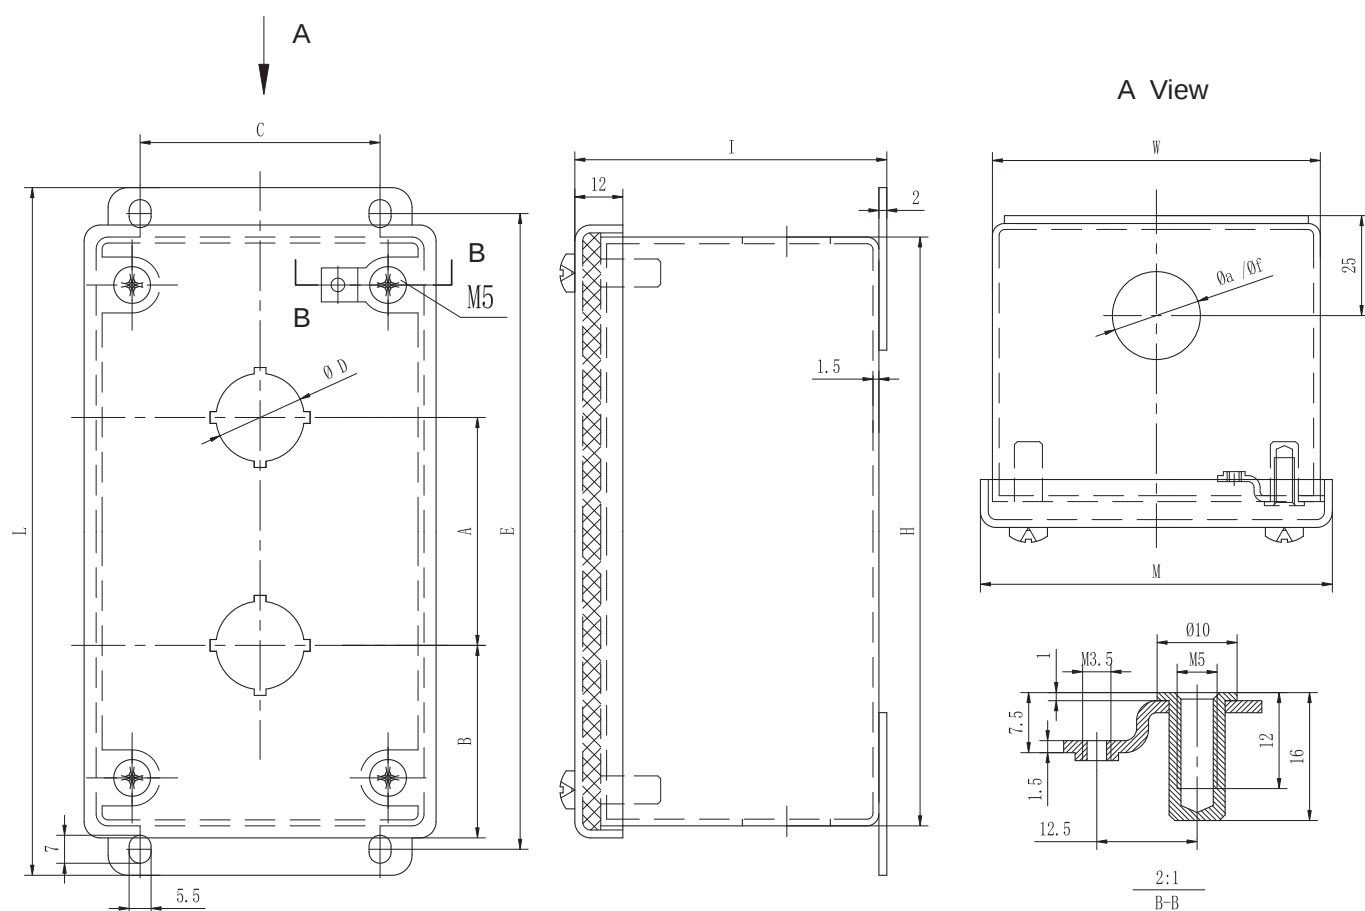

Number of Holes	Part Number	Dimensions												
		A	B	C	E	G	H	I	L	M	W	a	f	D
22mm														
1	CSM-2201	/	48	60	102	7X5.5	90	78	115	88	82	22	30	22.5
2	CSM-2202	57	48	60	159	7X5.5	147	78	172	88	82	22	30	22.5
3	CSM-2203	57	48	60	216	7X5.5	204	78	229	88	82	22	30	22.5
4	CSM-2204	40	45	60	216	7X5.5	204	78	229	88	82	22	30	22.5
5	CSM-2205	40	53.5	60	273	7X5.5	261	78	286	88	82	22	30	22.5
30mm														
1	CSM-3001	/	48	60	102	7X5.5	90	78	115	88	82	22	30	30.5
2	CSM-3002	57	48	60	159	7X5.6	147	78	172	88	82	22	30	30.5
3	CSM-3003	57	48	60	216	7X5.7	204	78	229	88	82	22	30	30.5
4	CSM-3004	57	48	60	273	7X5.8	261	78	286	88	82	22	30	30.5